

MONITORING POLE

Capture your world from a bird's eye point of view.

It extends up to 300cm height with a tripod supporting steady Put your 360° camera on it and show every world from the bird's eyes point of view. The center pole has a hole so that you may insert cables for the sounds and lighting unit. It gives you any ideas for the 3m height view. All black color finishing. Available on demands only,

629.4cm
 ↑
 The state that POLE has its own leg most highly
421.2cm Maximum Height

106.5cm Standard Height



| MONITORING POLE | EXTENSION POLE | TOTAL |
|---------------------------------------|----------------------|----------------------|
| ●Maximum height: 314.7cm / 123.90inch | 314.7cm / 123.90inch | 629.4cm / 247.79inch |
| ●Minimum height: 106.5cm / 41.93inch | | |
| ●Folded length: 101.5cm / 39.96inch | 101.5cm / 39.96inch | 203cm / 79.92inch |
| ●Weight: 2.81kg / 6.19lbs | 1.41kg / 3.11lbs | 4.22kg / 9.30lbs |
| ●Maximum Load: 0000g / 0.00lbs | | 0000g / 0.00lbs |
| ●Suggested Load: 0000g / 0.00lbs | | 0000g / 0.00lbs |
| ●Sections: 2 | 4 | 6 |



Velbon Corporation 6-1-5 Nogata, Nakano-ku, Tokyo 165-0027 JAPAN www.velbon.biz

Specifications are subject to change without notice.



What's New

photokina 2018+ New products information SEPTEMBER 2018

UT-3AR

Lightweight like the AiR you breathe, the UT-3AR weighs in at only 787g.

The 5-section ULTRA locking legs pivot 180° to nest against the elevated center column when fully compact. This functionality allows for a folded length no longer than an A4 sized note pad (297mm). Easily carry in your backpack or hang on your belt with a Karabiner, or store in the tripod carrying case included with purchase. The head includes an Arca Swiss style quick release plate.




This series feature legs that fold by reversing through a full 180 degrees.



| | |
|--------------------------|------------|
| MAX | 135.5 |
| cm / inch | 53.35 |
| | 118.2 |
| cm / inch | 46.54 |
| | 36.0 |
| cm / inch | 14.17 |
| | 29.5 |
| cm / inch | 11.61 |
| | 0.78 |
| kg / lbs | 1.73 |
| | 3.00 |
| Maximum Loading Weight | 6.61 |
| kg / lbs | 1.50 |
| Suggested Loading Weight | 3.31 |
| kg / lbs | 21 |
| Section | 0.83 |
| mm / inch | |
| | QB-3AS |
| | ARCA-SWISS |
| | TYPE |

↓ Tablet PC (12.9inch)

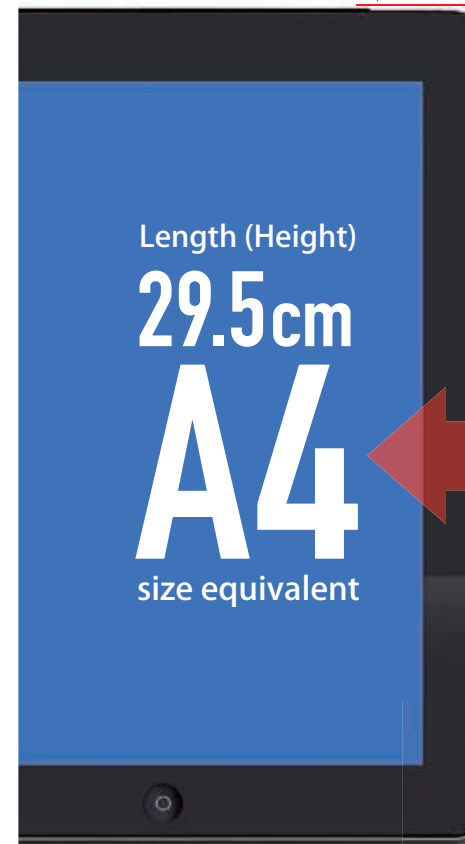

FEATURES



Turn the central leg adjuster to change the leg locking position. Twist it right to make legs non-reversible. This allows the leg angle to be changed to semi-low or full-low position for macro photography. The head includes an Arca Swiss style quick release plate. Quick release plate slides in and is locked.

135.5cm Maximum Height

GEO N740GE + QHD-G7AS

Combination with heavy duty GEO N740 GE Tripod and Ball head QHD-G7AS.



ML-6 + FHD-66A

Combination with ML-6 Leveler and heavy duty fluid head FHD-66A.



ML-6 + FHD-66A

Combination with ML-6 Leveler and heavy duty fluid head FHD-66A.

Unique independent Leveling unit, ML-6 is used between the Fluid head FHD-66A and the heavy duty tripod DV-7000N Legs. Leveling is necessary for Video makers and the fluid head can work well on ML-6. Sturdy Aluminium legs with braces and Geared elevator is basic function of DV-7000N. The best combination is designed by Velbon at Photokina 2018. FHD-66Q has unique function in its counter balance switch. Normally used as Oil.

FHD-66A

Smooth Fluid head but features Counter balance spring for the tilting. While unlocking the outer tilting stopper knob, seek for the centre bottom of the head may feel click to have the counter balance effects on. It prevents from sudden drop the camera due to its heavy weight by losing balance. Please use maximum 4kg loading weight on this head. And furthermore, in case of D-SLR user needs to have vertical position while taking movie, like portrait shots, the camera platform turns 90 degree.

- Height: 106mm/4.17inch
- Weight: 983g/2.17lbs
- UNC 3/8 & 1/4 inch tripod socket
- Maximum Loading Weight: 4.0kg/8.82lbs
- Suggested Loading Weight: 3.0kg/6.61lbs

Aluminium



Vertical position



Counter-balance-effect knob



ML-6

ML-6

More precise level is necessary for movie and panorama shots. Use between head and tripod to adjust on uneven terrain.

- H: 46.8(1.84)mm(inch)
- Weight: 260g/0.57lbs
- Diameter of the Pedestal: 55(2.17)mm(inch)
- UNC 1/4 inch screw

Aluminium



GEO N740 GE

This heavy duty tripod was constructed to support the heavy equipment frequently paired for use. Featuring a smooth geared crank elevator for raising the GEO N740 GE ("Geared Elevator") center column, the elevator will not drop suddenly as the center column locking knob is loosened. Made to protect your heavy camera and lens, the center column will descend only when you adjust the crank lever.

C carbon

Mg magnesium



UNC 3/8



elevator



Low angle

| | |
|--------------------------|-------|
| MAX | 168.6 |
| cm / inch | 66.38 |
| MAX | 141.6 |
| cm / inch | 55.75 |
| MAX | 35.0 |
| cm / inch | 13.78 |
| MAX | 59.0 |
| cm / inch | 23.23 |
| MAX | 2.75 |
| kg / lbs | 6.06 |
| Maximum Loading Weight | 12.00 |
| kg / lbs | 26.46 |
| Suggested Loading Weight | 7.00 |
| kg / lbs | 15.43 |
| Section | 32 |
| mm / inch | 1.26 |

QHD-G7AS

2 independent stopper knobs are the feature of the new head. One stopper for the horizontal panning for the panoramic shots. The other stopper is for multi angle position of the ball head. Adjusting tension of the ball is incorporated in the stopper knob. Use finger to rotate adjuster slightly to right or left to have ideal tension to move the ball.

- Height: 118mm/4.65inch
- Weight: 712g/1.57lbs

Aluminium




QB-7AS

FEATURES



New Geared Crank system

Geared elevator helps you to up and down even heavy equipment on the tripod. Backlash of the geared elevator is prevented by our technical design in the gear box.

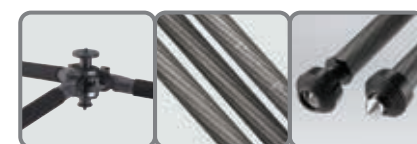

2-section center column can be detached to enable extra low picture taking angle as used in macro photography. (N730, N740) New spiral etched surface of carbon legs provides smooth and fast extension. Built-in scale indicates 2.5cm and 5cm intervals on each leg. 2-way adjustable legs tips provide metal spike or rubber feet options.